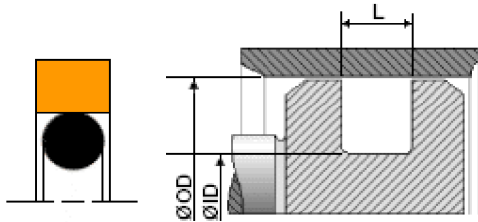


1704 Poly-Hone Piston Seal

[sizes](#)


Features

Poly-Hone Piston Seals are directly interchangeable with TFE, urethane, and rubber seals now being used. The 1704 is a square cross section that has a small footprint, making it resistant to hydroplaning, and is very effective at low pressures.

- 'O' leakage at low and high PSI
- easy to install, no resizing
- superior physical properties
- operating temperatures of -65 °F to +275 °F

Applications



- bulldozers
- forklifts
- construction equipment
- agricultural equipment
- mobile arm trucks
- injection molding machines
- mobilelifts
- general cylinders

Materials

Material	Hytrel HT2022
Hardness	55 Durometer D
Material	Hytrel HT2055 OR
Hardness	60 Durometer D

Operating Limits

Pressure (Typ.)	5000 Psi / 35 Mpa
Temperature (Typ.)	-54°C/135°C to -65°F/275°F

Installation

For complete Installation Instructions, [click here](#).